

200C/600V

# VW-I SIL-A-BLEND® 200

HIGH-TEMPERATURE LEAD WIRE

## RATINGS / APPROVALS

200°C - 600 Volts - UL Style 3512/3604 / CSA AWM I A/B FT2/FT1

UL VW-I Flame Rated

RoHS compliant

## CONSTRUCTION

### Conductors

22 AWG - 8 AWG

Stranded tinned copper or nickel-plated copper  
(Other conductor materials available)

### Insulating System

Composite Extruded Silicone Rubber with intermediate fiberglass reinforcement

Separator tape between conductor and silicone on select sizes  
(Not shown in illustration)

### Standard Color Coding

Available in All Colors

## CHARACTERISTICS

- Outperforms Braided Silicone products
  - Eliminates braid fraying, flowering, and shrink back
  - Virtually eliminates skin irritation
  - Reduces airborne fiberglass contaminants traditionally found in high volume processing
  - Superior flexibility
  - Color stable at elevated temperatures
  - LSZH - Low smoke, zero halogen
  - Suitable for varnish dip and bake applications
  - Smaller OD
- Silicone formulations suitable for UV, ozone, moisture exposure.
- Not suited for immersed applications.
- Suitable for applications to -60°C


150°C version with flexible stranded conductor is available. (consult factory)

## Recommended replacement for glass braided silicone

### COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

01-21

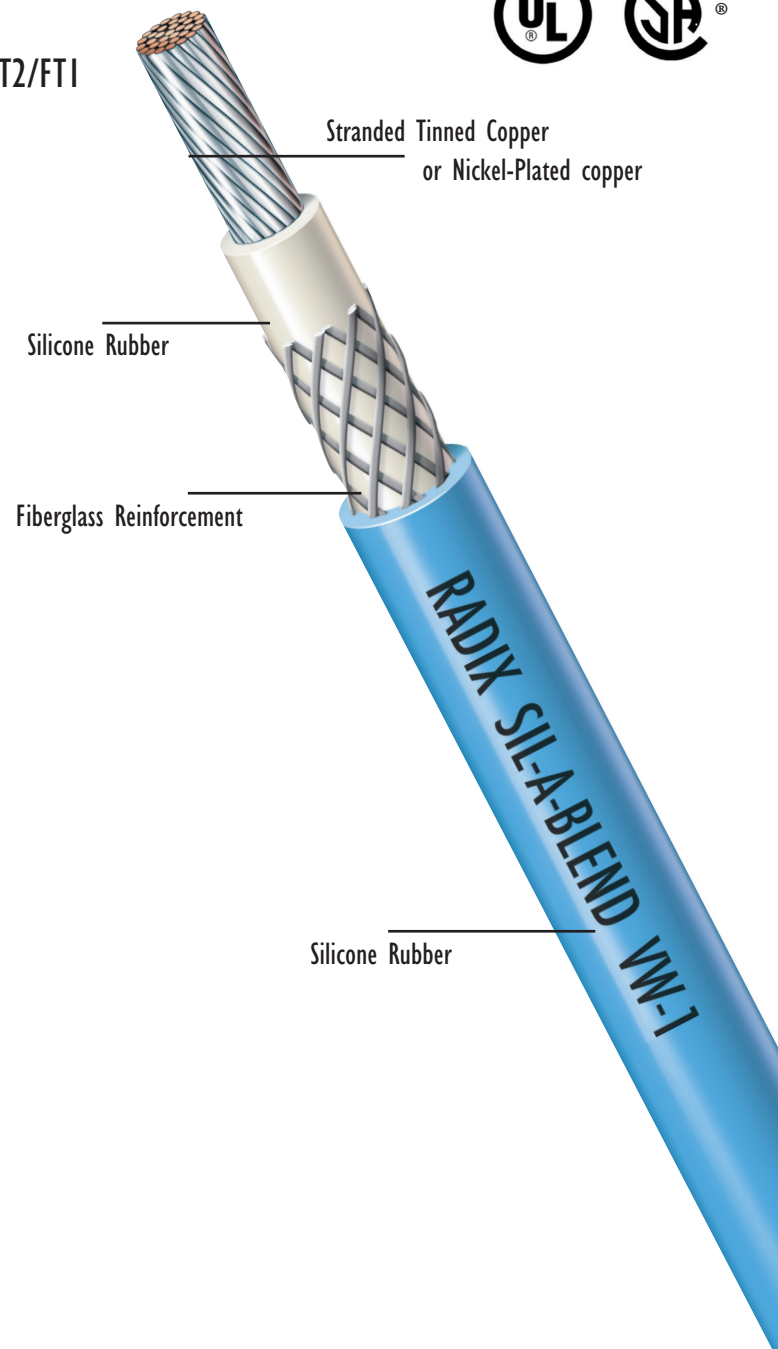

**Radix**<sup>TM</sup>  
WIRE & CABLE  
EST. 1944

# VW-I SIL-A-BLEND® 200

## HIGH-TEMPERATURE LEAD WIRE

### SPECIFICATIONS

#### VW-1 SIL-A-BLEND 200C/600V

Part No.	Temp Rating	Voltage Rating	Awg. Size	# Strands	Final O.D. (in)	Final O.D. (mm)	Wgt. (lbs/Mft)	Wgt. (kg/km)	Min. Bend Radius (in)	UL	CSA
NVW22P007	200C	600V	22 NPC 2%	7	0.099	2.51	6.53	9.72	0.79	3512/3604	AWM I A/B FT2
NVW20P007	200C	600V	20 NPC 2%	7	0.108	2.74	8.19	12.19	0.86	3512/3604	AWM I A/B FT1
NVW18T007	200C	600V	18	7	0.119	3.02	10.75	16.00	0.95	3512/3604	AWM I A/B FT1
NVW16T007	200C	600V	16	7	0.130	3.30	14.39	21.42	1.04	3512/3604	AWM I A/B FT1
NVW14T007	200C	600V	14	7	0.142	3.61	19.07	28.38	1.14	3512/3604	AWM I A/B FT1
NVW12T019	200C	600V	12	19	0.160	4.06	28.59	42.55	1.28	3512/3604	AWM I A/B FT1
NVW10T019	200C	600V	10	19	0.212	5.38	47.19	70.23	1.70	3512/3604	AWM I A/B FT1
NVW08T061	200C	600V	8	61	0.241	6.12	70.58	105.04	1.93	3512/3604	AWM I A/B FT1

Standard conductor: Tinned Copper or Nickel Plated Copper (2%) as designated  
Consult factory for alternative conductor and stranding options.

All dimensions listed above are nominal

Compliance: UL Listed File No. E22244. CSA Certified File No. LL13427 or LL80670

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.



**WIRE & CABLE**

EST. 1944

Radix Wire & Cable  
26000 Lakeland Boulevard, Euclid, OH 44132  
Tel: 216 731-9191 • Fax: 216 731-7082

[www.radix-wire.com](http://www.radix-wire.com)