

BRAIDED SRML SILICONE 150

HIGH-TEMPERATURE LEAD WIRE

150C/300V and 150C/600V

RATINGS / APPROVALS

150°C - 300 Volts - UL Style 3068 / CSA AWM I A/B FT2

150°C - 600 Volts - UL Style 3231, 3101, 3127, 3069, 3070 / CSA AWM I A/B FT2

IEC 60332-1-2; 60332-1-3; and 60332-2-2 Vertical Flame Propagation

RoHS Compliant

CONSTRUCTION

Conductors

24 AWG - 16 AWG (300 Volt)

24 AWG - 4/0 AWG (600 Volt)

Stranded tinned copper or nickel-plated copper
(Other conductor materials available)

Insulating System

Extruded Silicone Rubber

Outer Covering

Braided fiberglass with a high temperature finish


Standard Color Coding

Available in Colors or Striped Combinations

CHARACTERISTICS

- Silicone formulations suitable for UV, ozone, moisture exposure.
- Not suited for immersed applications.
- Suitable for applications to -60°C
- Silicone rubber in extreme environments, exceeding 200°C, leaves a non-conductive ash and retains excellent insulation properties.

UL VW-1 optional (consult factory)

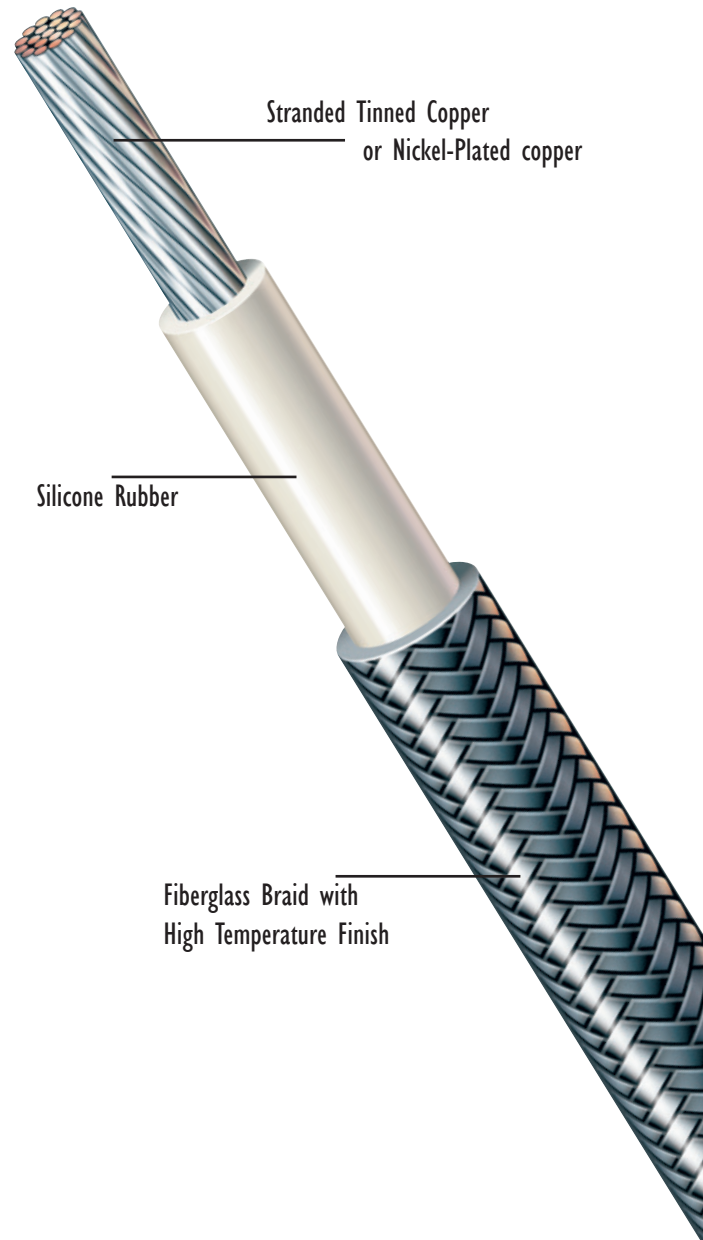

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

Radix[™]

WIRE & CABLE

EST. 1944

BRAIDED SRML SILICONE 150

HIGH-TEMPERATURE LEAD WIRE

SPECIFICATIONS

BRAIDED SILICONE 150C/300V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt. (lbs/Mft)	Wgt - kg per km	Min. Bend Radius (in)	UL	CSA
JBM24T007	24	7	0.067	1.70	3	4.79	0.54	3068	SEWF-1
JBM22T007	22	7	0.073	1.85	4	6.16	0.58	3068	SEWF-1
JBM20T007	20	7	0.080	2.03	6	8.24	0.64	3068	SEWF-1
JBM18T016	18	16	0.087	2.21	8	11.37	0.70	SFF-1/3068	SEWF-1
JBM16T026	16	26	0.097	2.46	11	16.33	0.78	3068	SEWF-1

BRAIDED SILICONE 150C/600V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt. (lbs/Mft)	Wgt - kg per km	Min. Bend Radius (in)	UL	CSA
JEM24T007	24	7	0.101	2.57	6	8.53	0.81	3231/3069	SEWF-2
JEM22T007	22	7	0.105	2.67	7	10.16	0.84	3231/3069	SEWF-2
JEM20T007	20	7	0.112	2.84	8	12.61	0.90	3231/3069	SEWF-2
JEM18T016	18	16	0.121	3.07	11	15.98	0.97	SFF-2/3231/3070 *	SEWF-2
JEM16T026	16	26	0.131	3.33	14	21.34	1.05	SFF-2/3231/3070 *	SEWF-2
JEM14T041	14	41	0.142	3.61	20	29.57	1.14	SFF-2/3231/3070 *	SEWF-2
JEM12T065	12	65	0.161	4.09	29	42.41	1.29	3231/3070 *	SEWF-2
JEM10T105	10	105	0.214	5.44	48	70.93	1.71	3231/3101*	SEWF-2
JEM08T133	8	133	0.309	7.85	86	128.30	2.47	3231*	SEWF-2
JEM06T133	6	133	0.355	9.02	123	182.90	2.84	3231*	SEWF-2

Standard conductor: Tinned Copper

Consult factory for alternative conductor and stranding options.

*Also referred to as **SRML**

All dimensions listed above are nominal

Compliance: UL Listed File No. E22244. CSA Certified File No. LL13427 or LL80670

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.



WIRE & CABLE
EST. 1944

Radix Wire & Cable
26000 Lakeland Boulevard, Euclid, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com