

250C/10KVAC/25KVDC

FEP HIGH VOLTAGE FLARE STACK CABLE

RATINGS / APPROVALS

250°C / 10KVAC / 25KVDC

CONSTRUCTION

Conductors:

18 AWG
Nickel-plated copper - 2%

Insulating System:


Silicone rubber with fiberglass braid cover

Jacketing:

Extruded Fluorinated Ethylene Propylene (FEP).
Standard color is black.

CHARACTERISTICS

- Excellent weather and chemical resistance
- High voltage silicone insulation system provides excellent heat and voltage protection
- High voltage suitable for flare stack igniter applications

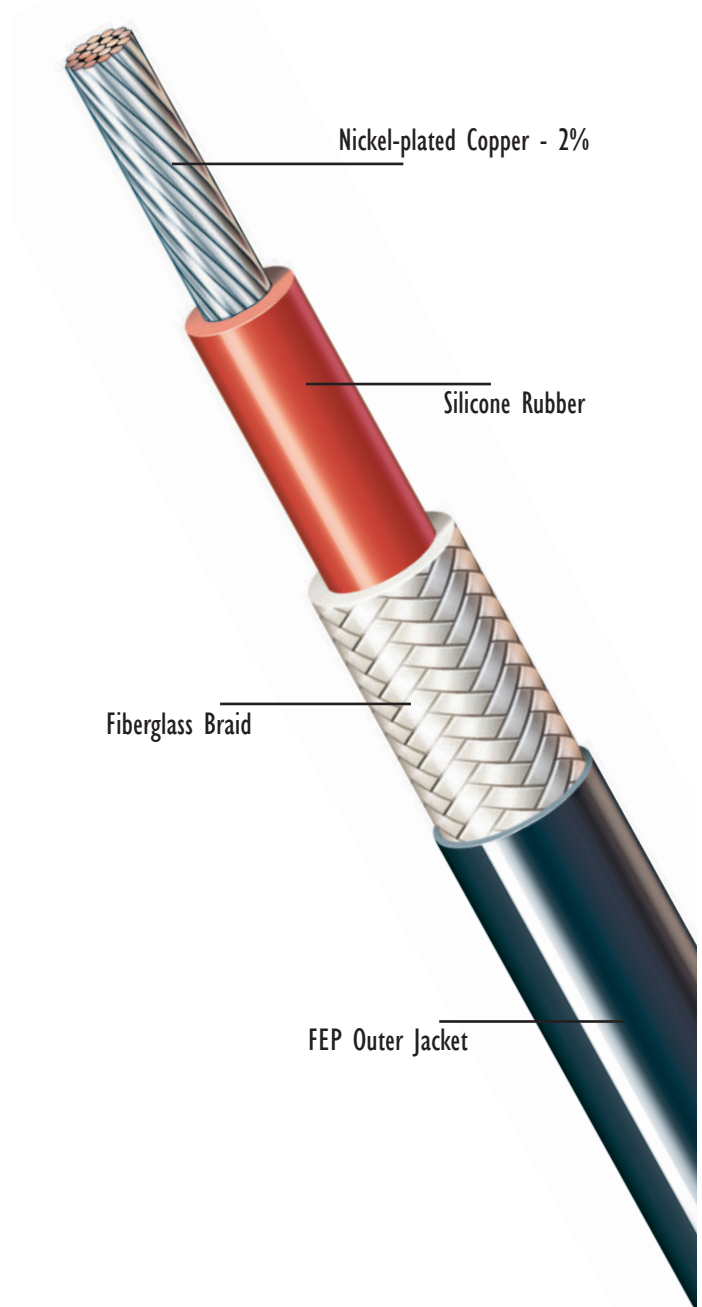

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

250C/10KVAC/25KVDC

FEP HIGH VOLTAGE FLARE STACK CABLE

FLARE STACK CABLE 250C/10KVAC/25KVDC SPECIFICATIONS

Part Number	AWG Size	# Cond.	Primary Mil-Wall	Core O.D.	Jacket Mil-Wall	Nominal OD	Wgt - lbs per 1000 ft
EDA18P019	18	19	0.081	0.218	0.021	0.260	40.27

All dimensions listed above are nominal
Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.

The logo for Radix Wire & Cable, featuring the word "Radix" in a stylized, red, cursive font with a trademark symbol.

WIRE & CABLE

EST. 1944

Radix Wire & Cable
26000 Lakeland Boulevard, Euclid, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com