

RATINGS / APPROVALS

250°C - 300 Volts - UL Style 1726 / CSA 250°C AWM I A/B FTI

250°C - 600 Volts - UL Style 1727 / CSA 250°C AWM I A/B FTI

250°C - 600 Volts - UL Style 10362, 10297 / CSA 250°C AWM I A/B FTI

RoHS Compliant

Passes UL VWI Flame Test

CONSTRUCTION

Conductors

24 AWG - 2/0 AWG

Nickel-plated copper - 2%

(Other conductor materials available)

Insulating System


Extruded perfluoroalkoxy copolymer (PFA)

Standard Color Coding

Available in Colors

CHARACTERISTICS

- Featuring small outside diameter, PFA offers optimum insulation for smaller applications at half the space of other constructions.
- Mechanical toughness and low coefficient of friction of PFA allow "pull" installation of long wire lengths.

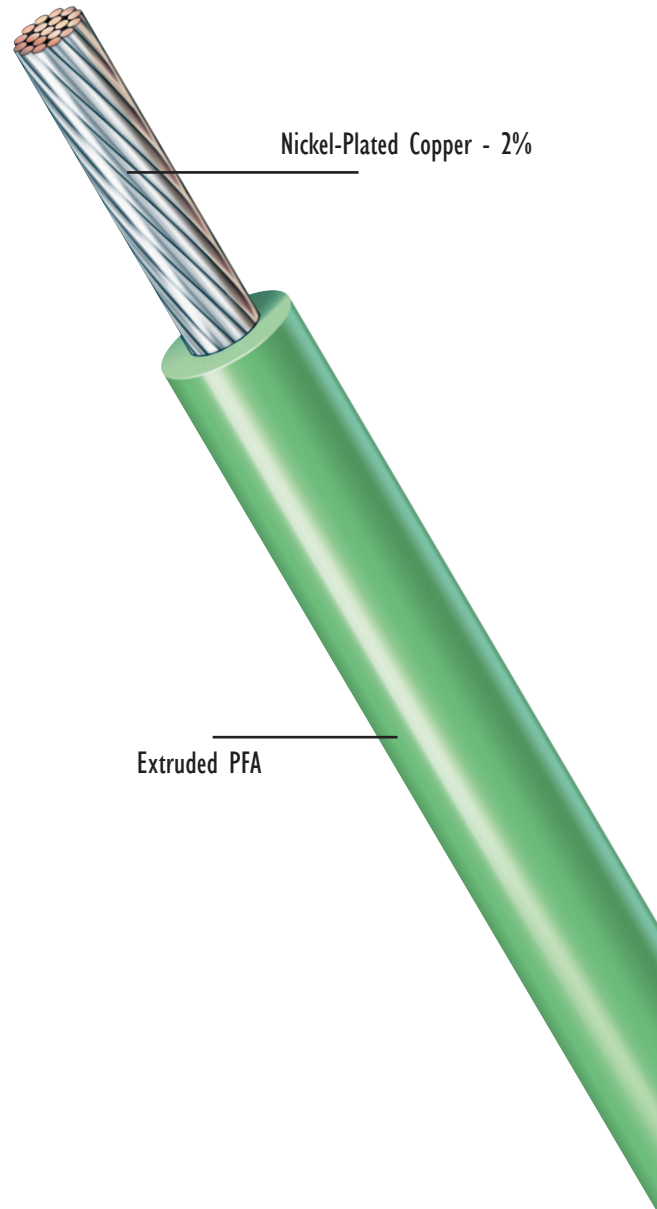

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

SPECIFICATIONS

PFA 250 HIGH-TEMPERATURE LEAD WIRE

PFA 250C/300V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km	UL	CSA 250C
GBA24P007	24	7	0.052	1.32	2.96	4.40	1726	AWM I A/B FT I
GBA22P007	22	7	0.058	1.47	3.90	5.80	1726	AWM I A/B FT I
GBA20P007	20	7	0.064	1.63	5.15	7.66	1726	AWM I A/B FT I
GBA20P010	20	10	0.063	1.60	5.14	7.65	1726	AWM I A/B FT I
GBA20P019	20	19	0.067	1.70	5.89	8.76	1726	AWM I A/B FT I
GBA18P019	18	19	0.072	1.83	7.30	10.86	1726	AWM I A/B FT I
GBA16P019	16	19	0.084	2.13	10.87	16.17	1726	AWM I A/B FT I
GBA16P026	16	26	0.085	2.16	10.95	16.29	1726	AWM I A/B FT I
GBA14P041	14	41	0.100	2.54	16.23	24.15	1726	AWM I A/B FT I

PFA 250C/600V

Part No..	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km	UL	CSA 250C
GDA24P007	24	7	0.066	1.68	4.14	6.16	1727	AWM I A/B FT I
GDA22P007	22	7	0.072	1.83	5.24	7.79	1727	AWM I A/B FT I
GDA20P007	20	7	0.078	1.98	6.61	9.83	1727	AWM I A/B FT I
GDA18P016	18	16	0.087	2.21	9.01	13.40	1727	AWM I A/B FT I
GDA18P019	18	19	0.086	2.18	8.92	13.27	1727	AWM I A/B FT I
GDA16P019	16	19	0.098	2.49	12.74	18.96	1727	AWM I A/B FT I
GDA16P026	16	26	0.099	2.51	12.84	19.10	1727	AWM I A/B FT I
GDA14P041	14	41	0.114	2.90	18.42	27.41	1727	AWM I A/B FT I
GDA12P065	12	65	0.132	3.35	27.43	40.82	1727	AWM I A/B FT I
GDA10P105	10	105	0.157	4.32	42.46	63.19	1727	AWM I A/B FT I
GDA08P133	8	133	0.225	5.72	70.51	104.94	1727	AWM I A/B FT I
GDA06P133	6	133	0.260	6.60	103.29	153.72	1727	AWM I A/B FT I
GDA04P133	4	133	0.322	8.18	158.80	236.32	1727	AWM I A/B FT I

PFA 250C/600V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km	UL	CSA 250C
GMA20P019	20	19	0.0630	1.60	5.31	7.90	10362/10297	AWM I A/B FT I
GMA20P010	20	10	0.0570	1.45	4.61	6.86	10362/10297	AWM I A/B FT I
GMA18P019	18	19	0.0660	1.68	6.69	9.96	10362/10297	AWM I A/B FT I
GMA16P026	16	26	0.0790	2.01	10.23	15.23	10362/10297	AWM I A/B FT I
GMA14P041	14	41	0.0940	2.39	15.37	22.88	10362/10297	AWM I A/B FT I

Standard conductor: Nickel Plated Copper - 2%
Consult factory for alternative conductor and stranding options.

All dimensions listed above are nominal
Compliance: UL Listed File No. E22244. CSA Certified File No. LL13427 or LL80670
Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.



WIRE & CABLE
EST. 1944

Radix Wire & Cable
26000 Lakeland Boulevard, Euclid, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com