

450C/300V and 450C/600V

DuraFlex[®] 450

HIGH-TEMPERATURE WIRE

RATINGS / APPROVALS

450°C - 300 Volts - UL 5334 / 5128 / CSA AWM I A/B FTI
450°C - 600 Volts - UL 5335 / 5107 / CSA AWM I A/B FTI
VW-I Flame Rated

CONSTRUCTION

Conductors

24 AWG - 14 AWG (300 Volts)
22 AWG - 8 AWG (600 Volts)
Stranded nickel-coated copper - 27%
(Other conductor materials available)

Insulating System

Mica glass composite

Outer Covering


Fiberglass braid with high temperature finish

Standard Color Coding

Natural and Solid Colors
Colored Tracers

CHARACTERISTICS

- Outperforms UL 5128/5107 MGT products:
 - Unique insulation system offers outstanding heat-aged flexibility for longer service life.
 - Passes UL 2X mandrel test after heat aging (UL 5128/5107 is 3X mandrel).
 - Excellent cutting and stripping characteristics, making it ideal for high volume manufacturing and assembly.
 - Provides dimensional consistency and uniformity.
- Resists braid pushback.
- Withstands mechanical abuse.

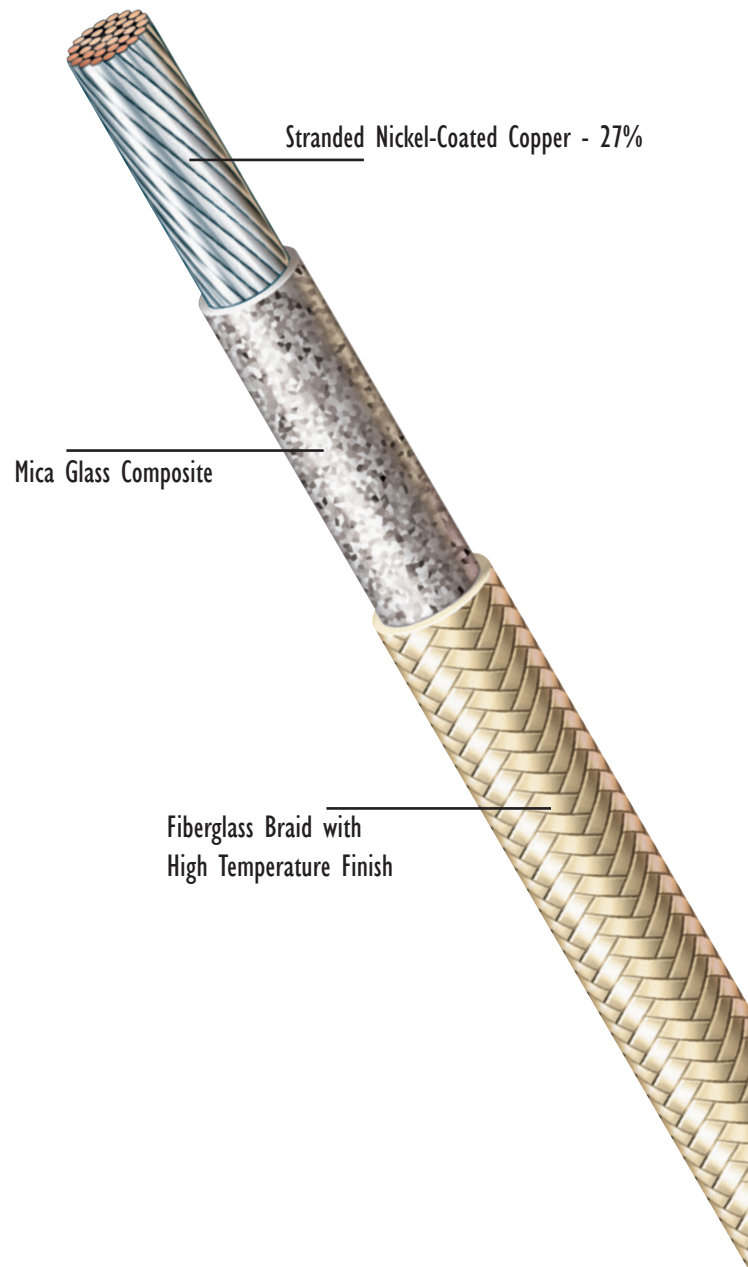

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

SPECIFICATIONS

DuraFlex® 450 HIGH-TEMPERATURE WIRE

DuraFlex 450C/300V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt. (lbs/Mft)	Wgt (kg/km)	Min. Bend Radius (in)	UL	CSA
DGT24C007	24	7	0.068	1.73	4	6.37	0.54	5334/5128	AWM I A/B FTI
DGT22C007	22	7	0.081	2.06	6	8.83	0.65	5334/5128	AWM I A/B FTI
DGT20C010	20	10	0.088	2.24	8	11.19	0.70	5334/5128	AWM I A/B FTI
DGT18C016	18	16	0.096	2.44	10	14.51	0.77	5334/5128	AWM I A/B FTI
DGT16C026	16	26	0.110	2.79	14	20.43	0.88	5334/5128	AWM I A/B FTI
DGT14C041	14	41	0.126	3.20	20	29.33	1.01	5334/5128	AWM I A/B FTI

DuraFlex 450C/600V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt. (lbs/Mft)	Wgt (kg/km)	Min. Bend Radius (in)	UL	CSA
DHT22C007	22	7	0.098	2.49	7	11.01	0.78	5335/5107	AWM I A/B FTI
DHT20C010	20	10	0.108	2.74	10	14.53	0.86	5335/5107	AWM I A/B FTI
DHT18C016	18	16	0.120	3.05	13	19.05	0.96	5335/5107	AWM I A/B FTI
DHT16C026	16	26	0.134	3.40	17	25.54	1.07	5335/5107	AWM I A/B FTI
DHT14C041	14	41	0.150	3.81	23	34.62	1.20	5335/5107	AWM I A/B FTI
DHT12C065	12	65	0.170	4.32	33	49.22	1.36	5335/5107	AWM I A/B FTI
DHT10C105	10	105	0.211	5.36	52	77.25	1.69	5335/5107	AWM I A/B FTI
DHT08C133	8	133	0.261	6.63	77	114.21	2.09	5335/5107	AWM I A/B FTI

Standard conductor: Nickel Coated Copper - 27%
Consult factory for alternative conductor and stranding options.

All dimensions listed above are nominal
Compliance: UL Listed File No. E22244, CSA Certified File No. LL13427 or LL80670
Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.



WIRE & CABLE
EST. 1944

Radix Wire & Cable
26000 Lakeland Boulevard, Euclid, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com