

# MCS FURNACE CABLE

## HIGH-TEMPERATURE LEAD WIRE

700C/600V and 1000C/300V

### RATINGS / APPROVALS

700°C - 600 Volt (Optional SS Braid)

1000°C - 300 Volt

Passes the IEEE-383 (modified) 210,000 BTU/hr Vertical Cable Tray Flame Test

Passes UL VW-1 Vertical Flame Test

Passes CSA FT1 Vertical Flame Test

RoHS Compliant

### CONSTRUCTION

#### Conductors

18 AWG - 8 AWG

Solid or Stranded A Nickel

#### Insulating System

High quality reinforced mica tape

#### Conductor Covering

Ceramic fiber braid coated with a high temperature finish

#### (Optional) Outer Braid

Stainless steel (not recommended for applications exceeding 700°C)

### CHARACTERISTICS


- Superior high temperature and oxidation resistance in normal temperatures to 1000°C
- Fire resistant
- Very low smoke emission when burned at rated temperature
- Resistant to many chemicals
- Maintains circuit integrity even when exposed to conditions of high ambient temperature and flame
- Optional stainless steel braid provides mechanical protection
- If wire is subjected to very rapid rise in temperature, the binder in the construction can ignite but will quickly extinguish. The resulting white ash is non-conductive.

### APPLICATION

- For use in non-flexing applications
- Wiring for ovens, kilns, and furnaces
- Where the normal installation environment includes continuous operating temperatures up to 1000°C and intermittent temperatures approaching 1200°C
- Not recommended for outdoor use

#### COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

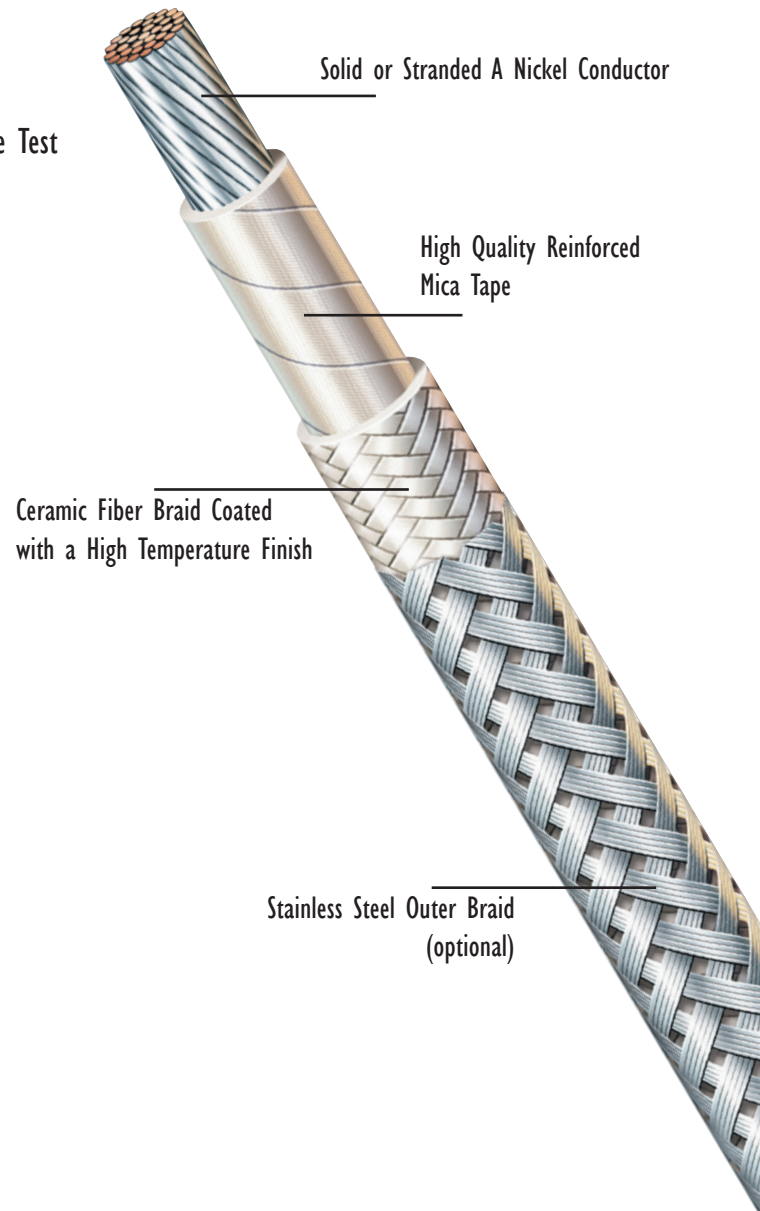

**Radix**<sup>™</sup>

**WIRE & CABLE**

EST. 1944

# SPECIFICATIONS

# MCS FURNACE CABLE

## HIGH-TEMPERATURE LEAD WIRE

### MCS FURNACE CABLE 700C/600V to 1000C/300V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km
<b>WITHOUT STAINLESS STEEL SHIELD</b>						
BTC18N016-Z01	18	16	0.156	3.96	14.52	21.61
BTC16N026-Z01	16	26	0.169	4.29	18.95	28.20
BTC14N041-Z01	14	41	0.182	4.62	24.97	37.16
BTC12N065-Z01	12	65	0.203	5.16	34.35	51.11
BTC10N105-Z01	10	105	0.230	5.84	50.15	74.62
BTC08N168-Z02	8	168	0.289	7.34	78.11	116.23
<b>STAINLESS STEEL SHIELD (Not recommended for applications exceeding 700°C)</b>						
BTC18N016-Z02	18	16	0.181	4.60	26.64	39.64
BTC16N026-Z02	16	26	0.194	4.93	31.57	46.98
BTC14N041-Z02	14	41	0.208	5.28	38.1	56.69
BTC12N065-Z02	12	65	0.228	5.79	49.49	73.64
BTC10N105-Z02	10	105	0.255	6.48	68.03	101.23
BTC08N168-Z01	8	168	0.314	7.98	99.25	147.68

Standard conductor: A nickel

Consult factory for alternative conductor and stranding options. Multi-conductor available on the data page.

All dimensions listed above are nominal

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.



**WIRE & CABLE**

EST. 1944

Radix Wire & Cable  
 26000 Lakeland Boulevard, Euclid, OH 44132  
 Tel: 216 731-9191 • Fax: 216 731-7082  
[www.radix-wire.com](http://www.radix-wire.com)