

250C/600V

PFA/PFA HIGH-TEMPERATURE CABLE

RATINGS / APPROVALS

250°C - 600 Volts

Passes the IEEE-383 Vertical Cable Tray Flame Test

Passes UL VW-I Flame Test

RoHS Compliant

CONSTRUCTION

Conductors:

22 AWG - 2 AWG

Nickel Plated Copper 2%

Insulating System:

Composite extruded perfluoroalkoxy (PFA) fluoropolymer insulation.

K-2 color code. (Unless specified)

Overall Binder Tapes:

Nomex®

Outer Covering:

Extruded perfluoroalkoxy (PFA) fluoropolymer outer jacket.

Standard Color:

Black (Colors available)

CHARACTERISTICS

- PFA leads have outstanding chemical, fluid, age, and ozone resistance.
- Fillers, where needed, are made with flame-impervious fibers with moisture repellent finish.
- Cable utilizes Radix “Torque Free” design. This eliminates memory found in traditional right hand or left hand twisted cables.
- Small diameter.


APPLICATION

Multiple conductor cables insulated and jacket with PFA Teflon® are widely used where small O.D. is required in industrial high temperature applications where resistance to abrasion and mechanical abuse coupled with moisture or fluid resistance are desired. This wire is widely used in steel and glass plants, as well as high temperature locations near boilers, steam lines and in chemical processing plants. Use above or below grade in raceway, tray, or conduit.

Nomex® is a registered trademark of DuPont.

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

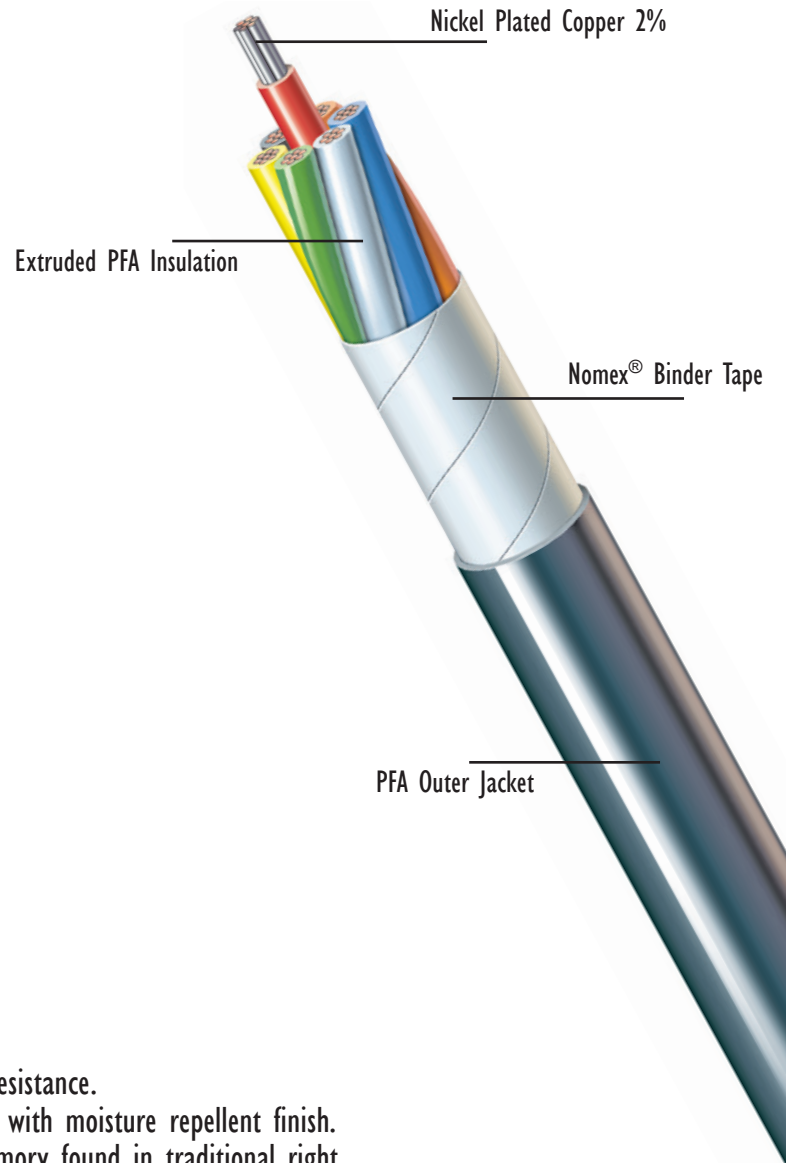

Radix™

WIRE & CABLE
EST. 1944

SPECIFICATIONS

PFA/PFA HIGH-TEMPERATURE CABLE

PFA/PFA 250C/600V

Part Number	AWG Size	# Strands.	# Leads	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km
GGI8GP02A	18	19	2	0.186	4.72	26.04	38.75
GGI8GP03A	18	19	3	0.198	5.03	34.94	52.00
GGI8GP04A	18	19	4	0.217	5.51	41.80	62.21
GGI8GP05A	18	19	5	0.240	6.10	51.16	76.14
GGI8GP06A	18	19	6	0.264	6.71	60.52	90.07
GGI6GP02A	16	26	2	0.211	5.36	34.55	51.42
GGI6GP03A	16	26	3	0.225	5.72	47.29	70.38
GGI6GP04A	16	26	4	0.247	6.27	58.05	86.39
GGI6GP05A	16	26	5	0.274	6.96	73.67	109.64
GGI6GP06A	16	26	6	0.307	7.80	89.61	133.36
GGI4GP02A	14	41	2	0.242	6.15	48.58	72.30
GGI4GP03A	14	41	3	0.257	6.53	66.08	98.34
GGI4GP04A	14	41	4	0.289	7.34	85.33	126.99
GGI4GP05A	14	41	5	0.321	8.15	107.24	159.60
GGI4GP06A	14	41	6	0.352	8.94	126.80	188.71
GGI2GP02A	12	65	2	0.282	7.16	70.15	104.40
GGI2GP03A	12	65	3	0.301	7.65	96.78	144.03
GGI2GP04A	12	65	4	0.331	8.41	122.83	182.80
GGI2GP05A	12	65	5	0.368	9.35	153.86	228.98
GGI2GP06A	12	65	6	0.404	10.26	182.55	271.68
GGI0GP02A	10	105	2	0.337	8.56	103.74	154.39
GGI0GP03A	10	105	3	0.360	9.14	145.45	216.46
GGI0GP04A	10	105	4	0.397	10.08	185.54	276.13
GGI0GP05A	10	105	5	0.442	11.23	231.84	345.03
GGI0GP06A	10	105	6	0.497	12.62	283.01	421.19

Standard conductor: Nickel Plated Copper 2%

Consult factory for alternate conductor and stranding options.

All dimensions listed above are nominal

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.



WIRE & CABLE

EST. 1944

Radix Wire & Cable
26000 Lakeland Boulevard, Euclid, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com