

200C/600V

SAB-K

HIGH-TEMPERATURE CABLE

RATINGS / APPROVALS

200°C - 600 Volts

Passes the IEEE-383 Vertical Cable Tray Flame Test

Passes NEMA WC 3 Flame Propagation Test

RoHS Compliant

CONSTRUCTION

Conductors:

22 AWG - 2 AWG

Annealed tinned copper

Insulating System:

Composite extruded silicone rubber with intermediate fiberglass reinforcement (Sil-A-Blend®)

K-2 color code. (Unless specified)

Overall Binder Tapes:

Polyester (Optional: Aluminum Polyester Tape Shield)

Outer Covering:

Braided aramid K-fiber with a moisture, heat and flame resistant finish.

Standard Color:

Black (Colors available)

CHARACTERISTICS


- Silicone formulations suitable for UV, ozone, moisture exposure.
- Fillers, where needed, are made with flame-impervious fibers with moisture-repellent finish.
- Cable utilizes Radix "Torque Free" design. This eliminates memory found in traditional right hand or left hand twisted cables.
- Binder tape is non-hydroscopic, non-wicking polyester.
- Aramid K-fiber provides superior cut through and abrasion resistance.
- Suitable for applications to -60°C.
- Not recommended for outdoor use.

APPLICATION

SAB-K is constructed for use in high temperature applications as a more flexible, multiple conductor control cable where resistance to abrasion and mechanical abuse are desired. This cable is used in steel and glass plants, as well as high temperature locations near boilers, steam lines and chemical processing plants. Use above grade in raceway, tray, or conduit.

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

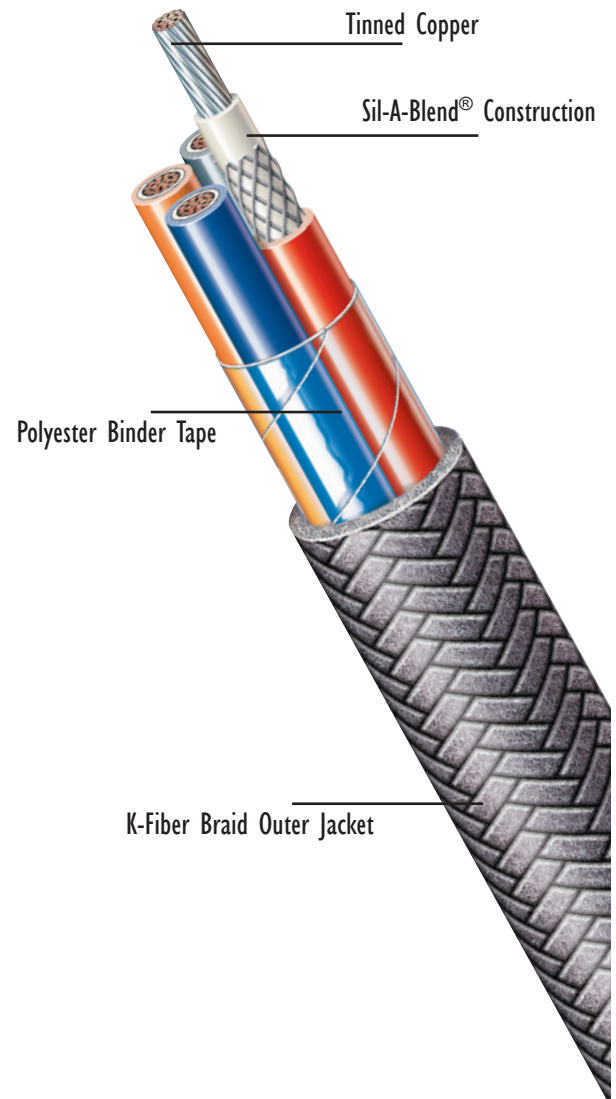

Radix™

WIRE & CABLE
EST. 1944

SPECIFICATIONS

SAB-K HIGH-TEMPERATURE CABLE

SAB-K 200C/600V

Part Number	AWG Size	# Strands.	# Leads	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft	Wgt - kg per km
NS18AT02G	18	7	2	0.294	7.47	36.47	54.28
NS18AT03G	18	7	3	0.312	7.92	46.99	69.93
NS18AT04G	18	7	4	0.341	8.66	56.75	84.46
NS18AT05G	18	7	5	0.375	9.53	71.41	106.27
NS18AT06G	18	7	6	0.411	10.44	83.74	124.62
NS16AT02G	16	7	2	0.316	8.03	45.00	66.97
NS16AT03G	16	7	3	0.335	8.51	59.48	88.52
NS16AT04G	16	7	4	0.367	9.32	73.23	108.98
NS16AT05G	16	7	5	0.406	10.31	91.91	136.78
NS16AT06G	16	7	6	0.461	11.71	113.42	168.80
NS14AT02G	14	7	2	0.343	8.71	58.86	87.60
NS14AT03G	14	7	3	0.364	9.25	78.13	116.28
NS14AT04G	14	7	4	0.399	10.13	97.91	145.71
NS14AT05G	14	7	5	0.458	11.63	127.81	190.21
NS14AT06G	14	7	6	0.508	12.90	153.35	228.22
NS12CT02G	12	19	2	0.377	9.58	78.40	116.68
NS12CT03G	12	19	3	0.401	10.19	108.12	160.91
NS12CT04G	12	19	4	0.457	11.61	141.25	210.21
NS12CT05G	12	19	5	0.512	13.00	178.50	265.65
NS12CT06G	12	19	6	0.572	14.53	215.56	320.80
NS10CT02G	10	19	2	0.506	12.85	131.23	195.30
NS10CT03G	10	19	3	0.547	13.89	185.44	275.98
NS10CT04G	10	19	4	0.604	15.34	235.37	350.29
NS10CT05G	10	19	5	0.651	16.54	285.20	424.45
NS10CT06G	10	19	6	0.719	18.26	340.03	506.05

Standard conductor: Tinned Copper

Consult factory for alternate conductor and stranding options.

All dimensions listed above are nominal

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.



WIRE & CABLE

EST. 1944

Radix Wire & Cable
26000 Lakeland Boulevard, Euclid, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com