

SRML-K 150/200

MOTOR LEAD & APPARATUS WIRE

150C/600V and 200C/600V

RATINGS / APPROVALS

150°C - 600 Volts - UL Style 3410

200°C - 600 Volts - UL Style 3410/3231

Passes the IEEE-383 Vertical Cable Tray Flame Test

Passes UL VW-I Vertical Flame Test

Silicone rubber insulation meets requirements of NEMA WC-3

RoHS Compliant

CONSTRUCTION

Conductors

16 AWG - 750 MCM

Stranded tinned copper

Insulating System

Extruded Silicone Rubber

Outer Covering


Braided aramid fiber with a moisture, heat, and flame resistant finish

Standard Color Coding

Black - optional colors available

CHARACTERISTICS

- Superior cut-through, impact, and abrasion resistance.
- The braided aramid fiber provides excellent mechanical protection.
- Moisture resistant.
- Aramid fibers are aromatic polyaramids produced by DuPont. Two versions are known as Kevlar® and Nomex®. These materials have excellent environmental and thermal stability, fatigue resistance, and impact resistance.
- Silicone Rubber in extreme environments, exceeding 200°C, leaves a non-conductive ash and retains excellent insulation properties.

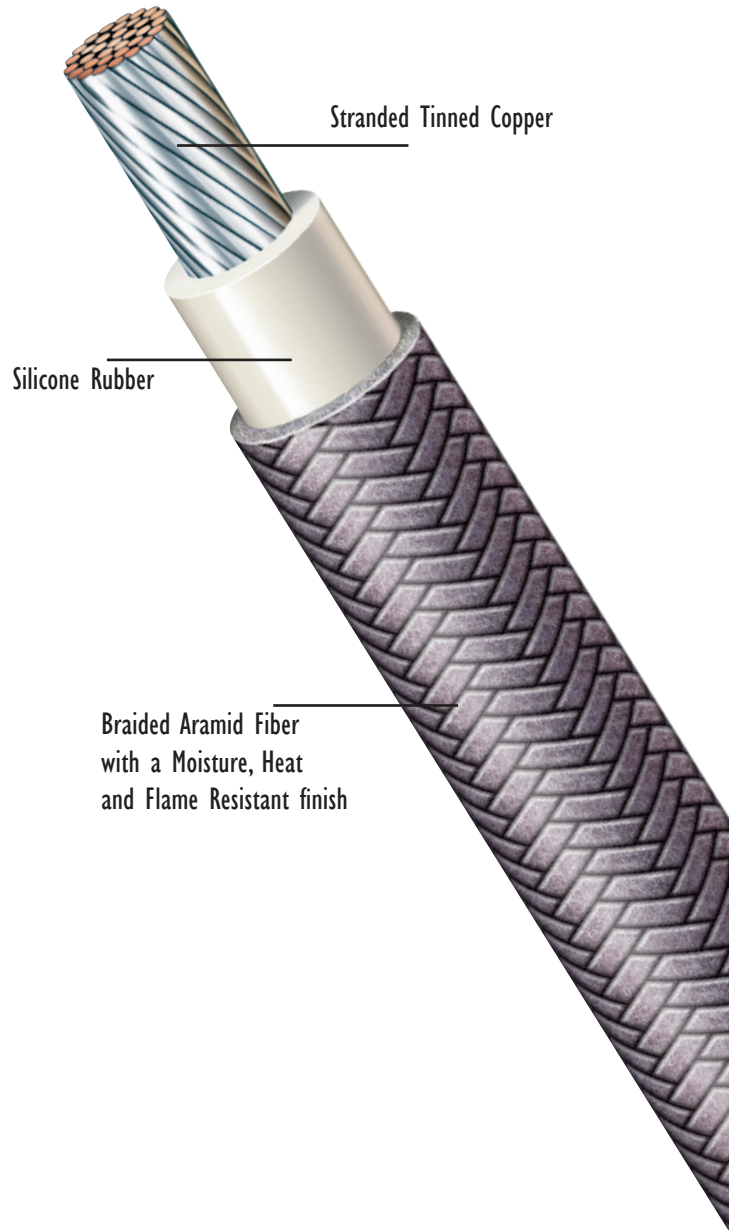

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

SPECIFICATIONS

SRML-K 150/200 MOTOR LEAD & APPARATUS WIRE

SRML-K 150C/600V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt. (lbs/Mft)	Wgt - kg per km	Min. Bend Radius (in)	UL	CSA
KGGI6T026	16	26	0.179	4.55	20	29.85	1.43	3410	N/A
KGGI4T041	14	41	0.194	4.93	26	38.92	1.55	3410	N/A
KGGI2T065	12	65	0.211	5.36	36	53.09	1.69	3410	N/A
KGGI0T105	10	105	0.234	5.94	50	74.52	1.87	3410	N/A
KGG08T133	8	133	0.325	8.26	109	162.62	2.60	3410	N/A
KGG06T133	6	133	0.371	9.42	150	222.88	2.97	3410	N/A

SRML-K 200C/600V

Part No.	Awg. Size	# Strands	Outer Dia. inches	Outer Dia. mm	Wgt. (lbs/Mft)	Wgt - kg per km	Min. Bend Radius (in)	UL	CSA
KGGI4T007	14	7	0.195	4.95	26	37.99	1.56	3410/3231	N/A
KGGI2T019	12	19	0.212	5.38	36	53.20	1.70	3410/3231	N/A
KGGI0T019	10	19	0.235	5.97	50	74.35	1.88	3410/3231	N/A
KGG08T061	8	61	0.306	7.77	106	157.84	2.45	3410/3231	N/A
KGG06T084	6	84	0.377	9.58	151	224.68	3.02	3410/3231	N/A
KGG04T133	4	133	0.411	10.44	196	291.74	3.29	3410/3231	N/A
KGG02T259	2	259	0.476	12.09	281	418.49	3.81	3410/3231	N/A
KGG01T259	1	259	0.547	13.89	357	530.57	4.38	3410/3231	N/A
KGGX1T259	1/0	259	0.610	15.49	446	663.77	4.88	3410/3231	N/A
KGGX2T259	2/0	259	0.656	16.66	539	801.55	5.25	3410/3231	N/A
KGGX3T259	3/0	259	0.703	17.86	653	971.92	5.62	3410/3231	N/A
KGGX4T259	4/0	259	0.763	19.38	797	1186.68	6.10	3410/3231	N/A
KGG25T427	250 MCM	427	0.862	21.89	957	1424.39	6.90	3410/3231	N/A
KGG35T427	350 MCM	427	0.972	24.69	1283	1909.76	7.78	3410/3231	N/A
KGG50T427	500 MCM	427	1.100	27.94	1733	2578.46	8.80	3410/3231	N/A
KGG75T703	750 MCM	703	1.372	34.85	2711	4034.03	10.98	3410/3231	N/A

Standard conductor: Tinned Copper

Consult factory for alternative conductor and stranding options.



WIRE & CABLE
EST. 1944

All dimensions listed above are nominal

Compliance: UL Listed File No. E22244. CSA Certified File No. LL13427 or LL80670

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.

Radix Wire & Cable
26000 Lakeland Boulevard, Euclid, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082

www.radix-wire.com