

150C/600V

SuperLinx™ I50

HIGH-TEMPERATURE LEAD WIRE

RATINGS / APPROVALS

150°C - 600 Volts - UL Style 3321 / CSA AWM I A/B FT1

150°C - 600 Volts - UL Style 3289 / CSA AWM I A/B FT1

RoHS Compliant



CONSTRUCTION

Conductors

24 AWG - 4/0 AWG (600 Volt) - UL 3321

24 AWG - 500 MCM AWG (600 Volt) - UL 3289

Stranded tinned copper

(Other conductor materials available)

Insulating System


Cross-linked Polyolefin

Standard Color Coding

Available in Colors

CHARACTERISTICS

- Abrasion Resistance
- Cut through Resistance
- Crush and Impact Resistant
- Excellent Tensile Strength
- Resistant to heat deformation
- Water and Moisture Resistant
- Oil and Fluid Resistance
- Resistant to Many Solvents and Hazardous Chemicals
- Ozone Resistance

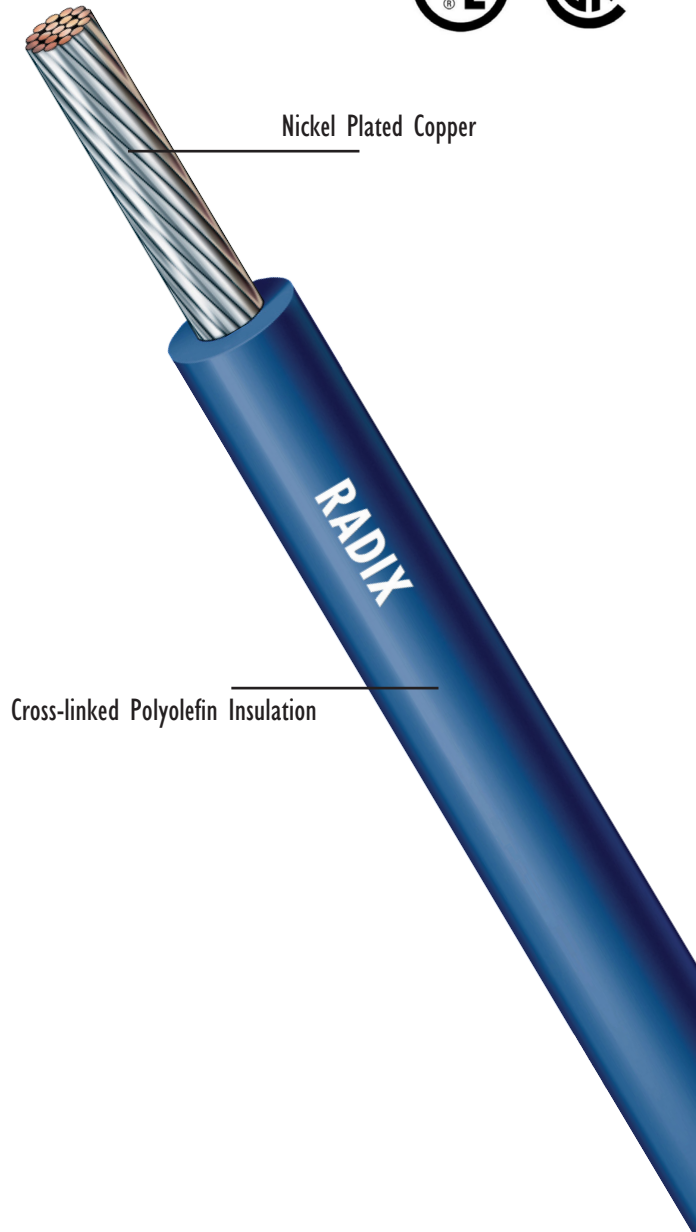

COPYRIGHT

This document is protected under copyright law and is the property of Radix Wire and Cable. Data contained herein is confidential to Radix Wire and Cable and this document and/or any part of the data contained herein may not be copied, duplicated or released for manufacturing or sale of equipment outside of Radix Wire and Cable or any affiliates without the prior written authorization of Radix Wire & Cable.

02-27-24

Radix™
WIRE & CABLE

SPECIFICATIONS

SuperLinx™ I50

HIGH-TEMPERATURE LEAD WIRE

SuperLinx™ 150C/600V UL 3321

Part No.	Awg. Size	# Strands	Final O.D. (in)	Final O.D. (mm)	Wgt. (lbs/Mft)	Wgt. (kg/km)	Min. Bend Radius (in)	UL	CSA
XFA24P007	24	7	0.086	2.18	4.13	6.15	0.69	3321	AWM I A/B FT-I
XFA22T007	22	7	0.091	2.31	5.02	7.47	0.73	3321	AWM I A/B FT-I
XFA20P007	20	7	0.099	2.51	6.66	9.91	0.79	3321	AWM I A/B FT-I
XFA18T016	18	16	0.107	2.72	8.88	13.21	0.86	3321	AWM I A/B FT-I
XFA16T026	16	26	0.117	2.97	12.34	18.37	0.94	3321	AWM I A/B FT-I
XFA14T041	14	41	0.132	3.35	17.72	26.37	1.06	3321	AWM I A/B FT-I
XFA12T065	12	65	0.149	3.78	26.15	38.92	1.19	3321	AWM I A/B FT-I
XFA10T105	10	105	0.172	4.37	39.41	58.64	1.38	3321	AWM I A/B FT-I
XFA08T133	8	133	0.251	6.38	67.45	100.39	2.01	3321	AWM I A/B FT-I
XFA06T133	6	133	0.297	7.54	101.59	151.19	2.38	3321	AWM I A/B FT-I
XFA04T133	4	133	0.337	8.56	142.18	211.60	2.70	3321	AWM I A/B FT-I
XFA02T259	2	259	0.449	11.40	248.98	370.54	3.59	3321	AWM I A/B FT-I
XFA01T259	1	259	0.507	12.88	296.36	441.05	4.06	3321	AWM I A/B FT-I
XFAX1T259	1/0	259	0.562	14.27	376.59	560.46	4.50	3321	AWM I A/B FT-I
XFAX2T259	2/0	259	0.608	15.44	464.18	690.82	4.86	3321	AWM I A/B FT-I
XFAX3T259	3/0	259	0.657	16.69	573.51	853.52	5.26	3321	AWM I A/B FT-I
XFAX4T259	4/0	259	0.717	18.21	711.27	1058.53	5.74	3321	AWM I A/B FT-I

SuperLinx™ 150C/600V UL 3289

Part No.	Awg. Size	# Strands	Final O.D. (in)	Final O.D. (mm)	Wgt. (lbs/Mft)	Wgt. (kg/km)	Min. Bend Radius (in)	UL	CSA
XGA24P007	24	7	0.086	2.18	4.15	6.18	0.69	3289	AWM I A/B FT-I
XGA22T007	22	7	0.091	2.31	5.02	7.47	0.73	3289	AWM I A/B FT-I
XGA20P007	20	7	0.099	2.51	6.67	9.93	0.79	3289	AWM I A/B FT-I
XGA18T016	18	16	0.107	2.72	8.88	13.21	0.86	3289	AWM I A/B FT-I
XGA16T026	16	26	0.117	2.97	12.34	18.37	0.94	3289	AWM I A/B FT-I
XGA14T041	14	41	0.132	3.35	17.72	26.37	1.06	3289	AWM I A/B FT-I
XGA12T065	12	65	0.149	3.78	26.15	38.92	1.19	3289	AWM I A/B FT-I
XGA10T105	10	105	0.172	4.37	39.41	58.64	1.38	3289	AWM I A/B FT-I
XGA08T133	8	133	0.251	6.38	67.64	100.66	2.01	3289	AWM I A/B FT-I
XGA06T133	6	133	0.327	8.31	109.23	162.56	2.62	3289	AWM I A/B FT-I
XGA04T133	4	133	0.367	9.32	150.80	224.43	2.94	3289	AWM I A/B FT-I
XGA02T259	2	259	0.449	11.40	248.98	370.54	3.59	3289	AWM I A/B FT-I
XGA01T259	1	259	0.507	12.88	296.36	441.05	4.06	3289	AWM I A/B FT-I
XGAX1T259	1/0	259	0.562	14.27	376.59	560.46	4.50	3289	AWM I A/B FT-I
XGAX2T259	2/0	259	0.608	15.44	464.18	690.82	4.86	3289	AWM I A/B FT-I
XGAX3T259	3/0	259	0.657	16.69	573.51	853.52	5.26	3289	AWM I A/B FT-I
XGAX4T259	4/0	259	0.717	18.21	711.27	1058.53	5.74	3289	AWM I A/B FT-I
XGA35T427	350	427	0.922	23.42	1167.60	1737.66	7.38	3289	AWM I A/B FT-I
XGA50T427	500	427	1.052	26.72	1601.70	2383.71	8.42	3289	AWM I A/B FT-I

Standard conductor: Nickel Plated Copper

Consult factory for alternative conductor and stranding options.

For additional cable configurations not listed, check our Website (www.radix-wire.com) or contact Sales at salesinfo@radix-wire.com.

All dimensions listed above are nominal

Compliance: UL Listed File No. E22244. CSA Certified File No. LL13427 or LL80670

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire & Cable is not responsible for any claim traceable to such error.

Use or disclosure of data contained on this sheet is subject to the restrictions on the title page.

